


# **HUBTRAC**

**“JOURNEY TO THE FUTURE”**





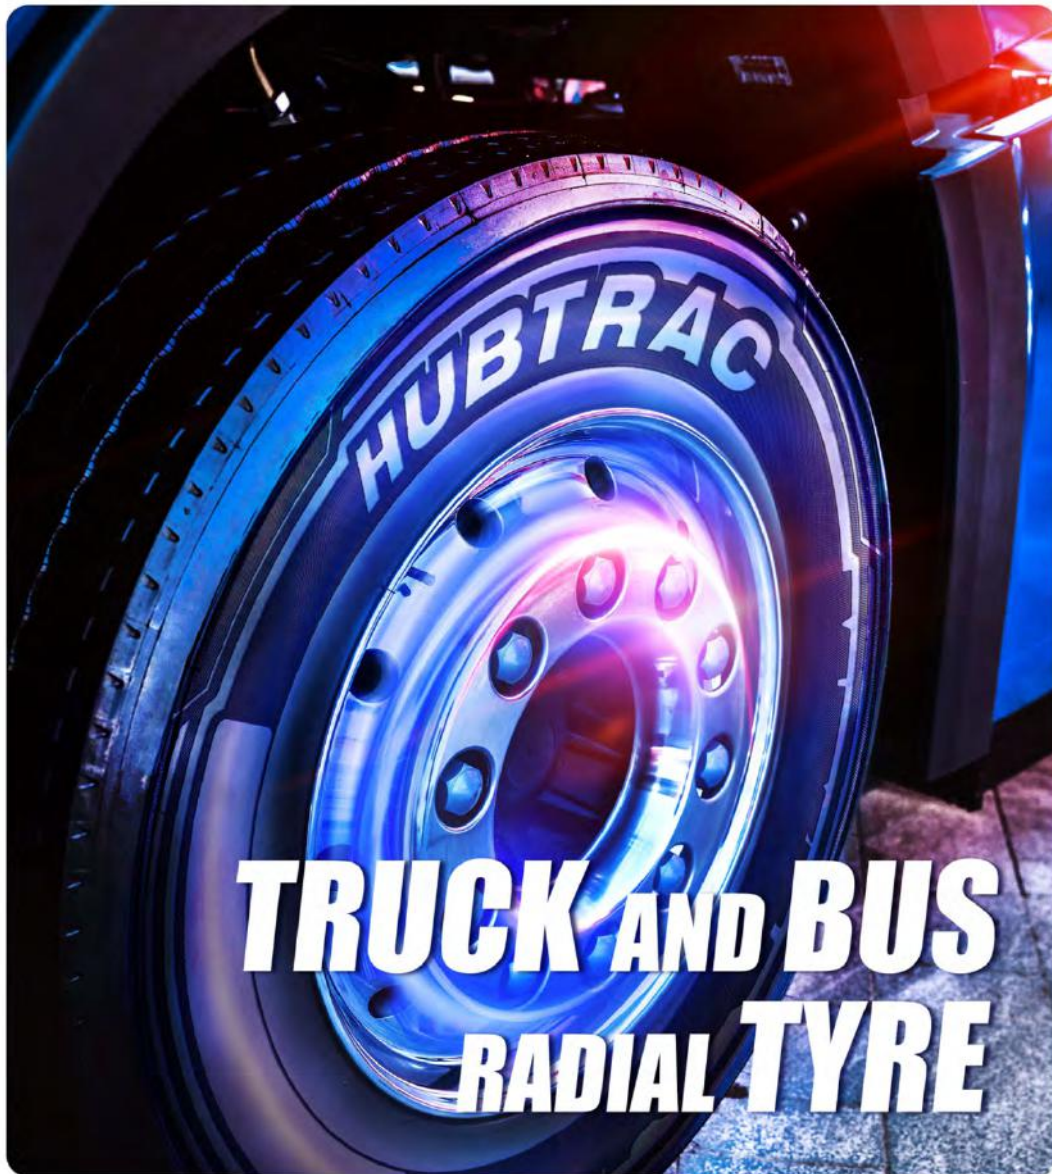
























**TRUCK AND BUS  
RADIAL TYRE**

**Hubtrac Classic Tyres**

Made in Serbia & Thailand

# PRODUCT MAP


	Long Haul	Regional	On/Off Road	Mine	Winter	Urban
						
Steer	  HIGHWAY S11    HIGHWAY S12	    REGIONAL S11    REGIONAL S12    REGIONAL S15    REGIONAL S16				
Drive	    HIGHWAY D11    HIGHWAY D12    HIGHWAY D15    HIGHWAY D16	   REGIONAL D11    REGIONAL D12    REGIONAL D15	 MIXED D11	 MINE D11	   WINTER D11    WINTER D12    WINTER D15	
Trailer	  HIGHWAY T11    HIGHWAY T12	  REGIONAL T11    REGIONAL T12	 MIXED T11		 WINTER T11	
General		   REGIONAL G11    REGIONAL G12    REGIONAL G15	   MIXED G11    MIXED G12    MIXED G15		 WINTER G11	   URBAN G11    URBAN G12    URBAN G15



# LONG HAUL



## HIGHWAY S11




- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design, improving mileage for long distance transportation.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	13.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	14.0
3	295/80R22.5	9.00	18	154/149M	-	3750	850	3250	850	1044	298	14.0
4	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5
5	315/60R22.5	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5
6	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.0
7	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.0
8	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	15.0
9	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.0
10	315/80R22.5	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.0
11	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	12.0
12	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	12.0

Remark : The above technical data are for reference only .



# HIGHWAY S12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Decoupling groove helps resist uneven shoulder wear.
- Straight five-rib tread design with four grooves provides improved handling.
- Variable zigzag groove help to reduce groove crack.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5

Remark : The above technical data are for reference only .



# HIGHWAY D11




- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design, with M+S and 3PMSF marking.
- New pattern design, improving mileage for long distance transportation.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	16.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.0
3	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	16.5
4	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	16.5
5	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	16.5
6	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0
7	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	17.0

Remark : The above technical data are for reference only .



## HIGHWAY D12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Closed shoulder design optimizes the footprint for even wear and long tread life.
- The combination of lateral and zigzag center grooves for good braking and grip on wet road.
- Low rolling resistance reduces fuel consumption.
- Strong carcass materials help promote tire durability and provide tire retreadability.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142L	-	2800	720	2650	720	1065	279	22
2	11R22.5	8.25	16	146/143L	-	3000	830	2725	830	1065	279	22
3	11R24.5	8.25	14	146/143L	-	3000	720	2725	720	1116	279	22
4	11R24.5	8.25	16	149/146L	-	3250	830	3000	830	1116	279	22
5	285/75R24.5	8.25	14	144/141L	-	2800	760	2575	760	1066	283	22
6	285/75R24.5	8.25	16	147/144L	-	3075	830	2800	830	1066	283	22
7	295/75R22.5	9.00	14	144/141L	-	2800	760	2575	760	1026	298	22
8	295/75R22.5	9.00	16	146/143L	-	3000	830	2725	830	1026	298	22

Remark : The above technical data are for reference only .



## HIGHWAY D15



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Tread design helps deliver all-season traction and reduction of uneven wear.
- Reduces weight for increased payload( Compared to duals).
- Construction optimized for fuel economy and long life.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	445/50R22.5	14.00	18	155L	-	3875	700	-	-	1024	445	20
2	445/50R22.5	14.00	18	158L	-	4250	760	-	-	1024	445	20
3	445/50R22.5	14.00	20	161L	-	4625	830	-	-	1024	445	20
4	445/50R22.5	14.00	20	161L	-	4625	850	-	-	1024	445	20

Remark : The above technical data are for reference only .



# HIGHWAY D16



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Shoulder and center block design provides traction in all conditions.
- Low heat generation with semi-open shoulder grooves.
- Variable zigzag groove help to reduce groove crack.
- Strong carcass materials help promote tire durability and provide tire retreadability.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1065	279	22.0
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1065	279	22.0
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1116	279	22.0
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1116	279	22.0
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1066	283	22.0
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1066	283	22.0
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1026	298	22.0
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1026	298	22.0

Remark : The above technical data are for reference only .



# HIGHWAY T11



M+S



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design ,improving mileage for long distance transportation.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R19.5	12.25	18	156J	-	4000	900	-	-	919	386	12.5
2	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	12.0
3	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	12.0
4	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	13.5
5	385/65R22.5	11.75	24	164K	158L	5000	900	-	-	1072	389	13.5
6	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	422	14.5
7	435/50R19.5	14.00	18	156J	-	4000	850	-	-	931	438	12.5
8	435/50R19.5	14.00	20	160J	-	4500	900	-	-	931	438	12.5
9	445/45R19.5	15.00	18	156J	-	4000	900	-	-	895	446	12.5
10	445/45R19.5	15.00	20	160J	-	4500	900	-	-	895	446	12.5

Remark : The above technical data are for reference only .



# HIGHWAY T12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Suitable for on-highway trailer application.
- Reduces weight for increased payload(VS duals).
- Construction optimized for fuel economy and long life.
- Special tread design for fuel economy.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	445/50R22.5	14.00	18	155L	-	3875	700	-	-	1018	445	10.5
1	445/50R22.5	14.00	18	158L	-	4250	760	-	-	1018	445	10.5
1	445/50R22.5	14.00	20	161L	-	4625	830	-	-	1018	445	10.5
1	445/50R22.5	14.00	20	161L	-	4625	850	-	-	1018	445	10.5

Remark : The above technical data are for reference only .







# REGIONAL



## REGIONAL S11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Reduces weight for increased payload( Compared to duals).
- Construction optimized for fuel economy and long life.
- Special tread design for fuel economy.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	14.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.5
3	295/80R22.5	9.00	18	154/149M	-	3750	850	3250	850	1044	298	16.5
4	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5
5	315/60R22.5	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5
6	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.5
7	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.5
8	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.5
9	315/80R22.5	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.5
10	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	13.5
11	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	13.5
12	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	15.5
13	385/65R22.5	11.75	24	164K	158L	5000	900	-	-	1072	389	15.5

Remark : The above technical data are for reference only .



## REGIONAL S12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort




- Optimized the footprint for long and even wear.
- Construction optimized for long life.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5

Remark : The above technical data are for reference only .



## REGIONAL S15

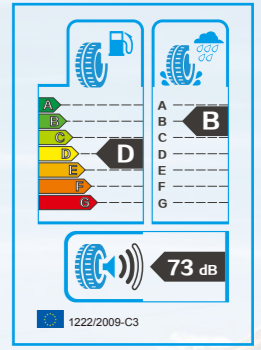

- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Long life.
- Retreadability.
- Low eccentric wear.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124M	-	1700	700	1600	700	767	211	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	225/75R17.5	6.75	12	126/125M	-	1700	675	1650	675	783	226	12.5
4	225/75R17.5	6.75	14	129/127M	-	1850	725	1750	725	783	226	12.5
5	235/75R17.5	6.75	14	132/130M	-	2000	775	1900	775	797	233	12.5
6	235/75R17.5	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5
7	235/75R17.5	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5
8	245/70R17.5	7.50	14	134/132M	-	2120	775	2000	775	789	248	12.5
9	245/70R17.5	7.50	16	136/134M	-	2240	850	2120	850	789	248	12.5
10	245/70R17.5	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5
11	245/70R19.5	7.50	12	129/127M	-	1850	660	1750	660	839	248	12.5
12	245/70R19.5	7.50	14	133/131M	-	2060	760	1950	760	839	248	12.5
13	245/70R19.5	7.50	14	133/131M	-	2060	750	1950	750	839	248	12.5
14	245/70R19.5	7.50	16	136/134M	-	2240	825	2120	825	839	248	12.5
15	265/70R19.5	7.50	14	136/134M	-	2240	725	2120	725	867	262	13.5
16	265/70R19.5	7.50	16	140/138M	-	2500	775	2360	775	867	262	13.5
17	265/70R19.5	7.50	18	143/141J	-	2725	850	2575	850	867	262	13.5
18	285/70R19.5	8.25	18	146/144M	-	3000	900	2800	900	895	283	13.5
19	285/70R19.5	8.25	18	150/148J	-	3350	900	3150	900	895	283	13.5
20	305/70R19.5	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	13.5

Remark : The above technical data are for reference only .



## REGIONAL S16



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort



- New technology for reducing tire weight.
- Low eccentric wear.
- Low fuel consumption.
- Good handling.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	20	160J	-	4500	900	-	-	1072	389	13.0
2	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	13.0
3	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	13.0

Remark : The above technical data are for reference only .



## REGIONAL D11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Optimization of the shoulder block,improving resistance to shoulder damage.
- Lasting grip and stability ,with M+S and 3PMSF marking.
- High wear resistance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	18.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5
3	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	19.5
4	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	20.0
5	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	20.0
6	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	22.0
7	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	22.0

Remark : The above technical data are for reference only .



## REGIONAL D12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Typical block pattern design suitable for drive axle of trucks.
- Good braking and grip on the road.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124M	-	1700	700	1600	700	767	211	14.0
2	225/75R17.5	6.75	12	126/125M	-	1700	675	1650	675	783	226	14.5
3	225/75R17.5	6.75	14	129/127M	-	1850	725	1750	725	783	226	14.5
4	235/75R17.5	6.75	14	132/130M	-	2000	775	1900	775	797	233	14.5
5	245/70R17.5	7.50	14	134/132M	-	2120	775	2000	775	789	248	14.5
6	245/70R17.5	7.50	16	136/134M	-	2240	850	2120	850	789	248	14.5
7	245/70R19.5	7.50	14	133/131M	-	2060	750	1950	750	839	248	14.5
8	245/70R19.5	7.50	16	136/134M	-	2240	825	2120	825	839	248	14.5
9	265/70R19.5	7.50	14	136/134M	-	2240	725	2120	725	867	262	15.5
10	265/70R19.5	7.50	16	140/138M	-	2500	775	2360	775	867	262	15.5
11	285/70R19.5	8.25	18	146/144M	-	3000	900	2800	900	895	283	16.0
12	305/70R19.5	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	16.0

Remark : The above technical data are for reference only .



## REGIONAL D15



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Tread design helps deliver all-season traction and reduction of uneven wear.
- Construction optimized for fuel economy and long life.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142L	-	2800	720	2650	720	1059	279	20.5
2	11R22.5	8.25	16	146/143L	-	3000	830	2725	830	1059	279	20.5
3	11R24.5	8.25	14	146/143L	-	3000	720	2725	720	1110	279	20.5
4	11R24.5	8.25	16	149/146L	-	3250	830	3000	830	1110	279	20.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1056	283	20.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1056	283	20.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1020	298	20.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1020	298	20.5

Remark : The above technical data are for reference only .



## REGIONAL T11




- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Strong , solid shoulders give excellent stability and handling.
- Special groove design for minimized stone retention and advanced stone rejection.
- New tread compound for optimized resistance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	205/65R17.5	6.00	16	129/127J	132/132G	1850	900	1750	900	711	204	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	235/75R17.5	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5
4	235/75R17.5	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5
5	245/70R17.5	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5

Remark : The above technical data are for reference only .



## REGIONAL T12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Tough tread compounds fight scrub wear,yet suitable for long mileage.
- Wide,continuous shoulder ribs fight turning side forces and resist tearing.
- 5-rib design provides vehicle stability and comfort.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1050	279	10.75
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1050	279	10.75
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1100	279	10.75
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1100	279	10.75
5	255/70R22.5	7.50	16	140/137M	-	2500	830	2300	830	930	255	10.75
6	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	10.75
7	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	10.75
8	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	10.75
9	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	10.75

Remark : The above technical data are for reference only .



## REGIONAL G11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Significant groove angles to help release stones and reduces damages from stone drilling.
- Zig-zag sipes help promote excellent traction throughout life of the tire.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124LM	-	1700	700	1600	700	767	211	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	215/75R17.5	6.00	16	135/133J/L	-	2180	850	2060	850	767	211	12.5

Remark : The above technical data are for reference only .



## REGIONAL G12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Typical zigzag groove design for ture multi-road use.
- Outstanding resistance to high scrub application from large solid shoulder.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	425/65R22.5	12.25	18	162K	-	4750	760	-	-	1124	422	17.5
2	425/65R22.5	12.25	20	165J	-	5150	825	-	-	1124	430	17.5
3	425/65R22.5	12.25	20	165J	-	5150	830	-	-	1124	422	17.5

Remark : The above technical data are for reference only .



# REGIONAL G15



1222/2009-C3



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Massive shoulders and application specific compound help resist scrub and abrasion ,extending tread life.
- Zogzag groove for true all-position use.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	18	158K	-	4250	830	-	-	1072	389	16.5
2	385/65R22.5	11.75	18	158K	-	4250	850	-	-	1072	389	16.5
3	385/65R22.5	11.75	20	160J	-	4500	900	-	-	1072	389	16.5
4	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	16.5

Remark : The above technical data are for reference only .










## MIXED T11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	16.5
2	385/55R22.5	12.25	20	160J	-	4500	900	-	-	996	386	16.5
3	385/65R22.5	11.75	18	158K	-	4250	850	-	-	1072	389	16.5
4	385/65R22.5	11.75	20	160K	-	4500	900	-	-	1072	389	16.5
5	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	16.5
6	425/65R22.5	12.25	20	165J	-	5150	825	-	-	1124	430	17.5
7	425/65R22.5	12.25	20	165K	-	5150	830	-	-	1124	422	17.5
8	445/65R22.5	13.00	20	168K	-	5600	830	-	-	1150	444	18.0
9	445/65R22.5	13.00	20	169J/K	-	5800	900	-	-	1150	454	18.0

Remark : The above technical data are for reference only .



## MIXED G11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142K	-	2800	720	2650	720	1054	279	15.0
2	11R22.5	8.25	16	146/143K	-	3000	830	2725	830	1054	279	15.0
3	11R22.5	8.25	16	148/145K	-	3150	850	2900	850	1050	279	16.5
4	11R22.5	8.25	16	148/145K	-	3150	850	2900	850	1054	279	15.5
5	11R24.5	8.25	16	149/146K	-	3250	830	3000	830	1104	279	15.5
6	12.00R20	8.50	18	154/151K	-	3750	830	3450	830	1125	315	17.0
7	12.00R24	8.50	18	156/153K	-	4000	775	3650	775	1226	313	17.0
8	12.00R24	8.50	20	160/156K	-	4500	850	4000	850	1226	313	17.0
9	12R22.5	9.00	16	150/147K	-	3350	830	3075	830	1085	300	17.0
10	12R22.5	9.00	16	152/148K	-	3550	850	3150	850	1084	300	17.0
11	12R22.5	9.00	18	152/149K	-	3550	930	3250	930	1085	300	17.0
12	255/70R22.5	7.50	16	140/137M	-	2500	830	2300	830	930	255	12.7
13	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0
14	315/80R22.5	9.00	20	156/150L	-	4000	850	3350	850	1076	312	17.0
15	315/80R22.5	9.00	20	157/154K	-	4125	900	3750	900	1076	312	17.0

Remark : The above technical data are for reference only .



## MIXED G12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort



- Thick sidewall design protect against sidewall impacts and bruises.
- Stone rejection design protect groove bottom from stone puncture.
- Lasting grip and stability ,with M+S and 3PMSF marking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	18	158L	-	4250	850	-	-	1072	389	18.0
2	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	18.0
3	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	18.0
4	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	430	18.5

Remark : The above technical data are for reference only .



## MIXED G15



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Thick sidewall design protect against sidewall impacts and bruises.
- Stone rejection design protect groove bottom from stone puncture.
- Lasting grip and stability ,with M+S and 3PMSF marking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	13R22.5	9.75	18	156/150K	-	4000	875	3350	875	1124	320	19.0
2	13R22.5	9.75	20	158/156K	-	4250	900	4000	900	1124	320	19.0
3	295/80R22.5	9.00	16	152/148K	-	3550	850	3150	850	1044	298	19.0
4	315/80R22.5	9.00	20	156/150K	-	4000	850	3350	850	1076	312	19.0
5	315/80R22.5	9.00	22	158/150K	-	4250	900	3350	900	1076	312	19.0
6	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	430	18.5
7	445/65R22.5	13.00	20	169J/K	-	5800	900	-	-	1150	454	18.5

Remark : The above technical data are for reference only .

# MINE



## MINE D11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Deep and rigid block design for good traction.
- Stone rejectors protect the casing in base of the tread groove.
- New tread compound for resistance to cuts, chips and tearing.
- Special sidewall design for logging use.

No.	Size	Rim	Ply Rating	L/SS	Second L/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143K	-	3000	830	2725	830	1065	279	23.0
2	11R24.5	8.25	16	149/146G	-	3250	830	3000	830	1116	279	25.0

Remark : The above technical data are for reference only .

# WINTER



## WINTER D11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Lasting grip and stability ,with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5
2	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	20.0
3	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	20.0
4	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	22.0
5	315/80R22.5	9.00	20	156/150L	154/150M	4000	900	3350	900	1076	312	22.0

Remark : The above technical data are for reference only .



## WINTER D12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- 3D sipes technology provides excellent traction and long original life.
- Integrated tie bars reduce irregular wear and promote increased stability.
- All weather lug tread design.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143L	-	3000	830	2725	830	1065	279	21.5
2	11R24.5	8.25	16	149/146L	-	3250	830	3000	830	1116	279	21.5

Remark : The above technical data are for reference only .



## WINTER D15



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	20.0
2	295/80R22.5	9.00	16	152/148K	-	3550	850	3150	850	1044	298	20.0
3	295/80R22.5	9.00	18	152/149K	-	3550	900	3250	900	1056	298	20.0
4	315/70R22.5	9.00	16	154/150L	-	3750	900	3350	900	1014	312	20.0
5	315/80R22.5	9.00	18	154/150K	-	3750	825	3350	825	1082	312	20.0
6	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	20.0
7	315/80R22.5	9.00	18	154/151K	-	3750	830	3450	830	1082	312	20.0
8	315/80R22.5	9.00	20	156/150K	-	4000	850	3350	850	1082	312	20.0
9	315/80R22.5	9.00	20	156/150L	-	4000	850	3350	850	1076	312	20.0
10	315/80R22.5	9.00	20	157/154K	-	4125	900	3750	900	1082	312	20.0

Remark : The above technical data are for reference only .



## WINTER T11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Lasting grip and stability ,with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	14.5
2	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	14.5
3	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	15.5
4	385/65R22.5	11.75	24	164K	158L	5000	900	-	-	1072	389	15.5

Remark : The above technical data are for reference only .



## WINTER G11



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Plenty of sipes offer high safety and good handling even on the snow or ice road.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	15.0
2	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1104	279	15.0
3	275/70R22.5	8.25	16	148/145M	-	3150	900	2900	900	958	276	15.0
4	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1026	298	15.0
5	295/80R22.5	9.00	18	152/149K	-	3550	900	3250	900	1050	298	15.0
6	315/80R22.5	9.00	18	154/151K	-	3750	830	3450	830	1076	312	15.0
7	385/65R22.5	11.75	20	160J	-	4500	900	-	-	1072	389	16.5

Remark : The above technical data are for reference only .



# URBAN



## URBAN G11



1222/2009-C3



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort



- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%, with application of ST steel cord.
- Tire bead cracking is prevented, with application fiber layer in bead area.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	275/70R22.5	8.25	16	148/145J	-	3150	900	2900	900	958	276	21.0

Remark : The above technical data are for reference only .



## URBAN G12



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Long life.
- Good grip performance.
- Low eccentric wear.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	16.0
2	12R22.5	9.00	16	150/147L	-	3350	830	3075	830	1085	300	17.0
3	12R22.5	9.00	18	152/149L	-	3550	930	3250	930	1085	300	17.0
4	275/70R22.5	8.25	16	148/145M	-	3150	900	2900	900	958	276	16.0
5	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	17.0
6	295/80R22.5	9.00	18	152/149M	-	3550	900	3250	900	1050	298	17.0
7	295/80R22.5	9.00	18	154/149M	-	3750	850	3250	850	1044	298	17.0

Remark : The above technical data are for reference only .



## URBAN G15



- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Enhanced sidewall ensures high safety.
- Typical used for urban bus with wide footprint for long mileage and vehicle stability.
- Specially reinforced sidewall design.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143F	-	3000	830	2725	830	1054	279	20.0
2	275/70R22.5	8.25	16	148/145J	152/148E	3150	900	2900	900	958	276	19.5
3	295/80R22.5	9.00	18	152/149J	-	3550	900	3250	900	1056	298	20.0
4	305/70R22.5	9.00	16	152/148J	154/150E	3550	900	3150	900	1000	305	20.0

Remark : The above technical data are for reference only .



No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL
1	11R22.5	HIGHWAY D12	8.25	14	144/142L	-	2800	720	2650	720	1065	279	22	YES	-	-	-	-	-	-	-
2	11R22.5	HIGHWAY D12	8.25	16	146/143L	-	3000	830	2725	830	1065	279	22	YES	-	-	-	-	-	-	-
3	11R22.5	HIGHWAY D16	8.25	14	144/142M	-	2800	720	2650	720	1065	279	22.0	YES	-	-	-	-	-	-	-
4	11R22.5	HIGHWAY D16	8.25	16	146/143M	-	3000	830	2725	830	1065	279	22.0	YES	-	-	-	-	-	-	-
5	11R22.5	HIGHWAY S12	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5	YES	-	-	-	-	-	-	-
6	11R22.5	HIGHWAY S12	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5	YES	-	-	-	-	-	-	-
7	11R22.5	MINE D11	8.25	16	146/143K	-	3000	830	2725	830	1065	279	23.0	YES	-	-	-	-	-	-	-
8	11R22.5	MIXED G11	8.25	14	144/142K	-	2800	720	2650	720	1054	279	15.0	YES	-	-	-	-	-	-	-
9	11R22.5	MIXED G11	8.25	16	146/143K	-	3000	830	2725	830	1054	279	15.0	YES	-	-	-	-	-	-	-
10	11R22.5	MIXED G11	8.25	16	148/145K	-	3150	850	2900	850	1050	279	16.5	YES	YES	YES	D	B	2	73	-
11	11R22.5	MIXED G11	8.25	16	148/145K	-	3150	850	2900	850	1054	279	15.0	YES	-	-	-	-	-	-	-
12	11R22.5	REGIONAL D15	8.25	14	144/142L	-	2800	720	2650	720	1059	279	20.5	YES	-	-	-	-	-	-	-
13	11R22.5	REGIONAL D15	8.25	16	146/143L	-	3000	830	2725	830	1059	279	20.5	YES	-	-	-	-	-	-	-
14	11R22.5	REGIONAL S12	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5	YES	-	-	-	-	-	-	-
15	11R22.5	REGIONAL S12	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5	YES	-	-	-	-	-	-	-
16	11R22.5	REGIONAL T12	8.25	14	144/142M	-	2800	720	2650	720	1050	279	10.75	YES	-	-	-	-	-	-	-
17	11R22.5	REGIONAL T12	8.25	16	146/143M	-	3000	830	2725	830	1050	279	10.75	YES	-	-	-	-	-	-	-
18	11R22.5	URBAN G12	8.25	16	146/143M	-	3000	830	2725	830	1054	279	16.0	YES	-	-	-	-	-	-	-
19	11R22.5	URBAN G15	8.25	16	146/143F	-	3000	830	2725	830	1054	279	20.0	YES	-	-	-	-	-	-	-
20	11R22.5	WINTER D12	8.25	16	146/143L	-	3000	830	2725	830	1065	279	21.5	YES	-	-	-	-	-	-	-
21	11R22.5	WINTER D15	8.25	16	146/143M	-	3000	830	2725	830	1054	279	20.0	YES	-	-	-	-	-	-	-
22	11R22.5	WINTER G11	8.25	16	146/143M	-	3000	830	2725	830	1054	279	15.0	YES	-	-	-	-	-	-	-
23	11R24.5	HIGHWAY D12	8.25	14	146/143L	-	3000	720	2725	720	1116	279	22	YES	-	-	-	-	-	-	-
24	11R24.5	HIGHWAY D12	8.25	16	149/146L	-	3250	830	3000	830	1116	279	22	YES	-	-	-	-	-	-	-
25	11R24.5	HIGHWAY D16	8.25	14	146/143M	-	3000	720	2725	720	1116	279	22.0	YES	-	-	-	-	-	-	-
26	11R24.5	HIGHWAY D16	8.25	16	149/146M	-	3250	830	3000	830	1116	279	22.0	YES	-	-	-	-	-	-	-
27	11R24.5	HIGHWAY S12	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5	YES	-	-	-	-	-	-	-
28	11R24.5	HIGHWAY S12	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5	YES	-	-	-	-	-	-	-
29	11R24.5	MINE D11	8.25	16	149/146G	-	3250	830	3000	830	1116	279	25.0	YES	-	-	-	-	-	-	-
30	11R24.5	MIXED G11	8.25	16	149/146K	-	3250	830	3000	830	1104	279	15.5	YES	-	-	-	-	-	-	-
31	11R24.5	REGIONAL D15	8.25	14	146/143L	-	3000	720	2725	720	1110	279	20.5	YES	-	-	-	-	-	-	-
32	11R24.5	REGIONAL D15	8.25	16	149/146L	-	3250	830	3000	830	1110	279	20.5	YES	-	-	-	-	-	-	-
33	11R24.5	REGIONAL S12	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5	YES	-	-	-	-	-	-	-
34	11R24.5	REGIONAL S12	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5	YES	-	-	-	-	-	-	-
35	11R24.5	REGIONAL T12	8.25	14	146/143M	-	3000	720	2725	720	1100	279	10.75	YES	-	-	-	-	-	-	-
36	11R24.5	REGIONAL T12	8.25	16	149/146M	-	3250	830	3000	830	1100	279	10.75	YES	-	-	-	-	-	-	-
37	11R24.5	WINTER D12	8.25	16	149/146L	-	3250	830	3000	830	1116	279	21.5	YES	-	-	-	-	-	-	-
38	11R24.5	WINTER G11	8.25	16	149/146M	-	3250	830	3000	830	1104	279	15.0	YES	-	-	-	-	-	-	-
39	12.00R20	MIXED G11	8.50	18	154/151K	-	3750	830	3450	830	1125	315	17.0	YES	YES	YES	D	B	2	73	-
40	12.00R24	MIXED G11	8.50	18	156/153K	-	4000	775	3650	775	1226	313	17.0	YES	YES	YES	D	B	2	73	-

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL	
41	12.00R24	MIXED G11	8.50	20	160/156K	-	4500	850	4000	850	1226	313	17.0	YES	YES	YES	D	B	2	73	-	
42	12R22.5	MIXED G11	9.00	16	150/147K	-	3350	830	3075	830	1085	300	17.0	YES	-	-	-	-	-	-	-	-
43	12R22.5	MIXED G11	9.00	16	152/148K	-	3550	850	3150	850	1084	300	17.0	YES	YES	YES	D	B	2	73	-	
44	12R22.5	MIXED G11	9.00	18	152/149K	-	3550	930	3250	930	1085	300	17.0	YES	-	-	-	-	-	-	-	-
45	12R22.5	URBAN G12	9.00	16	150/147L	-	3350	830	3075	830	1085	300	17.0	YES	-	-	-	-	-	-	-	-
46	12R22.5	URBAN G12	9.00	18	152/149L	-	3550	930	3250	930	1085	300	17.0	YES	-	-	-	-	-	-	-	-
47	13R22.5	MIXED D11	9.75	18	156/150K	-	4000	875	3350	875	1124	320	21.0	YES	YES	YES	D	B	2	73	-	
48	13R22.5	MIXED G15	9.75	18	156/150K	-	4000	875	3350	875	1124	320	19.0	YES	YES	YES	D	B	2	73	-	
49	13R22.5	MIXED G15	9.75	20	158/156K	-	4250	900	4000	900	1124	320	19.0	YES	YES	YES	D	B	2	73	-	
50	205/65R17.5	REGIONAL T11	6.00	16	129/127J	132/132G	1850	900	1750	900	711	204	12.5	YES	YES	-	D	B	2	72	-	
51	215/75R17.5	REGIONAL D12	6.00	14	126/124M	-	1700	700	1600	700	767	211	14.0	YES	YES	YES	D	C	2	73	-	
52	215/75R17.5	REGIONAL G11	6.00	14	126/124LM	-	1700	700	1600	700	767	211	12.5	YES	YES	YES	E	B	2	72	-	
53	215/75R17.5	REGIONAL G11	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	-	-	-	-	-	-	-	-
54	215/75R17.5	REGIONAL G11	6.00	16	135/133J/L	-	2180	850	2060	850	767	211	12.5	YES	YES	YES	E	B	2	72	-	
55	215/75R17.5	REGIONAL S15	6.00	14	126/124M	-	1700	700	1600	700	767	211	12.5	YES	YES	YES	D	B	2	73	-	
56	215/75R17.5	REGIONAL S15	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	YES	YES	D	B	2	73	-	
57	215/75R17.5	REGIONAL T11	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	YES	-	D	B	2	72	-	
58	225/75R17.5	REGIONAL D12	6.75	12	126/125M	-	1700	675	1650	675	783	226	14.5	YES	YES	YES	D	C	2	73	-	
59	225/75R17.5	REGIONAL D12	6.75	14	129/127M	-	1850	725	1750	725	783	226	14.5	YES	YES	YES	D	C	2	73	-	
60	225/75R17.5	REGIONAL S15	6.75	12	126/125M	-	1700	675	1650	675	783	226	12.5	YES	YES	YES	D	B	2	73	-	
61	225/75R17.5	REGIONAL S15	6.75	14	129/127M	-	1850	725	1750	725	783	226	12.5	YES	YES	YES	D	B	2	73	-	
62	235/75R17.5	REGIONAL D12	6.75	14	132/130M	-	2000	775	1900	775	797	233	14.5	YES	YES	YES	D	C	2	73	-	
63	235/75R17.5	REGIONAL S15	6.75	14	132/130M	-	2000	775	1900	775	797	233	12.5	YES	YES	YES	D	B	2	73	-	
64	235/75R17.5	REGIONAL S15	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5	YES	YES	YES	D	B	2	73	-	
65	235/75R17.5	REGIONAL S15	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5	YES	YES	YES	D	B	2	73	-	
66	235/75R17.5	REGIONAL T11	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5	YES	YES	-	D	B	2	72	-	
67	235/75R17.5	REGIONAL T11	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5	YES	YES	-	D	B	2	72	-	
68	245/70R17.5	REGIONAL D12	7.50	14	134/132M	-	2120	775	2000	775	789	248	14.5	YES	YES	YES	D	C	2	73	-	
69	245/70R17.5	REGIONAL D12	7.50	16	136/134M	-</																

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL
81	255/70R22.5	REGIONAL T12	7.50	16	140/137M	-	2500	830	2300	830	930	255	10.75	YES	-	-	-	-	-	-	-
82	265/70R19.5	REGIONAL D12	7.50	14	136/134M	-	2240	725	2120	725	867	262	15.5	YES	YES	YES	D	C	2	73	-
83	265/70R19.5	REGIONAL D12	7.50	16	140/138M	-	2500	775	2360	775	867	262	15.5	YES	YES	YES	D	C	2	73	-
84	265/70R19.5	REGIONAL S15	7.50	14	136/134M	-	2240	725	2120	725	867	262	13.5	YES	YES	YES	D	B	2	73	-
85	265/70R19.5	REGIONAL S15	7.50	16	140/138M	-	2500	775	2360	775	867	262	13.5	YES	YES	YES	D	B	2	73	-
86	265/70R19.5	REGIONAL S15	7.50	18	143/141J	-	2725	850	2575	850	867	262	13.5	YES	YES	YES	D	B	2	73	-
87	275/70R22.5	URBAN G11	8.25	16	148/145J	-	3150	900	2900	900	958	276	21.0	NO	-	-	D	B	2	73	-
88	275/70R22.5	URBAN G12	8.25	16	148/145M	-	3150	900	2900	900	958	276	16.0	YES	-	-	-	-	-	-	-
89	275/70R22.5	URBAN G15	8.25	16	148/145J	152/148E	3150	900	2900	900	958	276	19.5	YES	-	-	-	-	-	-	-
90	275/70R22.5	WINTER G11	8.25	16	148/145M	-	3150	900	2900	900	958	276	15.0	YES	-	-	-	-	-	-	-
91	285/70R19.5	REGIONAL D12	8.25	18	146/144M	-	3000	900	2800	900	895	283	16.0	YES	YES	YES	D	C	2	73	-
92	285/70R19.5	REGIONAL S15	8.25	18	146/144M	-	3000	900	2800	900	895	283	13.5	YES	YES	YES	D	B	2	73	-
93	285/70R19.5	REGIONAL S15	8.25	18	150/148J	-	3350	900	3150	900	895	283	13.5	YES	YES	YES	D	B	2	73	-
94	285/75R24.5	HIGHWAY D12	8.25	14	144/141L	-	2800	760	2575	760	1066	283	22	YES	-	-	-	-	-	-	-
95	285/75R24.5	HIGHWAY D12	8.25	16	147/144L	-	3075	830	2800	830	1066	283	22	YES	-	-	-	-	-	-	-
96	285/75R24.5	HIGHWAY D16	8.25	14	144/141M	-	2800	760	2575	760	1066	283	22.0	YES	-	-	-	-	-	-	-
97	285/75R24.5	HIGHWAY D16	8.25	16	147/144M	-	3075	830	2800	830	1066	283	22.0	YES	-	-	-	-	-	-	-
98	285/75R24.5	HIGHWAY S12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5	YES	-	-	-	-	-	-	-
99	285/75R24.5	HIGHWAY S12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5	YES	-	-	-	-	-	-	-
100	285/75R24.5	REGIONAL D15	8.25	14	144/141M	-	2800	760	2575	760	1056	283	20.5	YES	-	-	-	-	-	-	-
101	285/75R24.5	REGIONAL D15	8.25	16	147/144M	-	3075	830	2800	830	1056	283	20.5	YES	-	-	-	-	-	-	-
102	285/75R24.5	REGIONAL S12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5	YES	-	-	-	-	-	-	-
103	285/75R24.5	REGIONAL S12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5	YES	-	-	-	-	-	-	-
104	285/75R24.5	REGIONAL T12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	10.75	YES	-	-	-	-	-	-	-
105	285/75R24.5	REGIONAL T12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	10.75	YES	-	-	-	-	-	-	-
106	295/60R22.5	HIGHWAY D11	9.00	16	150/147L	-	3350	900	3075	900	926	292	16.0	YES	YES	YES	D	C	2	75	-
107	295/60R22.5	HIGHWAY S11	9.00	16	150/147L	-	3350	900	3075	900	926	292	13.0	YES	YES	YES	D	C	2	73	-
108	295/60R22.5	REGIONAL D11	9.00	16	150/147L	-	3350	900	3075	900	926	292	18.0	YES	YES	YES	E	B	2	75	-
109	295/60R22.5	REGIONAL S11	9.00	16	150/147L	-	3350	900	3075	900	926	292	14.0	YES	YES	YES	C	C	2	73	-
110	295/75R22.5	HIGHWAY D12	9.00	14	144/141L	-	2800	760	2575	760	1026	298	22	YES	-	-	-	-	-	-	-
111	295/75R22.5	HIGHWAY D12	9.00	16	146/143L	-	3000	830	2725	830	1026	298	22	YES	-	-	-	-	-	-	-
112	295/75R22.5	HIGHWAY D16	9.00	14	144/141M	-	2800	760	2575	760	1026	298	22.0	YES	-	-	-	-	-	-	-
113	295/75R22.5	HIGHWAY D16	9.00	16	146/143M	-	3000	830	2725	830	1026	298	22.0	YES	-	-	-	-	-	-	-
114	295/75R22.5	HIGHWAY S12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5	YES	-	-	-	-	-	-	-
115	295/75R22.5	HIGHWAY S12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5	YES	-	-	-	-	-	-	-
116	295/75R22.5	REGIONAL D15	9.00	14	144/141M	-	2800	760	2575	760	1020	298	20.5	YES	-	-	-	-	-	-	-
117	295/75R22.5	REGIONAL D15	9.00	16	146/143M	-	3000	830	2725	830	1020	298	20.5	YES	-	-	-	-	-	-	-
118	295/75R22.5	REGIONAL S12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5	YES	-	-	-	-	-	-	-
119	295/75R22.5	REGIONAL S12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5	YES	-	-	-	-	-	-	-
120	295/75R22.5	REGIONAL T12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	10.75	YES	-	-	-	-	-	-	-

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL
121	295/75R22.5	REGIONAL T12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	10.75	YES	-	-	-	-	-	-	-
122	295/75R22.5	WINTER G11	9.00	16	146/143M	-	3000	830	2725	830	1026	298	15.0	YES	-	-	-	-	-	-	-
123	295/80R22.5	HIGHWAY D11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.0	YES	YES	YES	C	C	2	75	-
124	295/80R22.5	HIGHWAY S11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	14.0	YES	YES	YES	D	C	2	73	-
125	295/80R22.5	HIGHWAY S11	9.00	18	154/149M	-	3750	850	3250	850	1044	298	14.0	YES	YES	YES	D	C	2	73	HL
126	295/80R22.5	MIXED G15	9.00	16	152/148K	-	3550	850	3150	850	1044	298	19.0	YES	YES	YES	D	B	2	73	-
127	295/80R22.5	REGIONAL D11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5	YES	YES	YES	E	B	2	75	-
128	295/80R22.5	REGIONAL S11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.5	YES	YES	YES	C	C	2	73	-
129	295/80R22.5	REGIONAL S11	9.00	18	154/149M	-	3750	850	3250	850	1044	298	16.5	YES	YES	YES	C	C	2	73	HL
130	295/80R22.5	URBAN G12	9.00	16	152/148M	-	3550	850	3150	850	1044	298	17.0	YES	YES	-	D	B	1	70	-
131	295/80R22.5	URBAN G12	9.00	18	152/149M	-	3550	900	3250	900	1050	298	17.0	YES	-	-	-	-	-	-	-
132	295/80R22.5	URBAN G12	9.00	18	154/149M	-	3750	850	3250	850	1044	298	17.0	YES	YES	-	D	B	1	70	HL
133	295/80R22.5	URBAN G15	9.00	18	152/149J	-	3550	900	3250	900	1056	298	20.0	YES	-	-	-	-	-	-	-
134	295/80R22.5	WINTER D11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5	YES	YES	YES	D	B	2	74	-
135	295/80R22.5	WINTER D15	9.00	16	152/148K	-	3550	850	3150	850	1044	298	20.0	YES	YES	YES	D	C	2	73	-
136	295/80R22.5	WINTER D15	9.00	18	152/149K	-	3550	900	3250	900	1056	298	20.0	YES	-	-	-	-	-	-	-
137	295/80R22.5	WINTER G11	9.00	18	152/149K	-	3550	900	3250	900	1050	298	15.0	YES	-	-	-	-	-	-	-
138	305/70R19.5	REGIONAL D12	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	16.0	YES	YES	YES	D	C	2	73	-
139	305/70R19.5	REGIONAL S15	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	13.5	YES	YES	YES	D	B	2	73	-
140	305/70R22.5	URBAN G15	9.00	16	152/148J	154/150E	3550	900	3150	900	1000	305	20.0	YES	-	-	-	-	-	-	-
141	315/60R22.5	HIGHWAY D11	9.75	16	152/148L	-	3550	900	3150	900	950	313	16.5	YES	YES	YES	C	C	2	75	-
142	315/60R22.5	HIGHWAY S11	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5	YES	YES	YES	D	C	2	73	-
143	315/60R22.5	HIGHWAY S11	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5	YES	YES	YES	D	C	2	73	HL
144	315/60R22.5	REGIONAL D11	9.75	16	152/148L	-	3550	900	3150	900	950	313	19.5	YES	YES	YES	E	B	2	75	-
145	315/60R22.5	REGIONAL S11	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5	YES	YES	YES	C	C	2	73	-
146	315/60R22.5	REGIONAL S11	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5	YES	YES	YES	C	C	2	73	HL
147	315/70R22.5	HIGHWAY D11	9.00	16	154/150L	152/148M	3750	900	3350	900	1014										





# **HUBTRAC TYRES**

## **JOURNEY TO THE FUTURE**

### **Premium Selections of Truck Tires**

Experience peak performance with our premium truck tire collection. Crafted for durability and precision, our high-end tires redefine excellence on the road.

Hubtrac stands as an emblematic European tire brand. With its roots in German design philosophies and manufacturing expertise, each tire is precision-produced in our Serbian facility, which boasts the most advanced and contemporary European production equipment. Anticipating the future, Hubtrac is poised to unveil an innovative new product line in 2023.

For comprehensive details on *Hubtrac New Generation Tyres*, we invite you to explore our official websites: [www.hubtractyre.com](http://www.hubtractyre.com) and [www.hubtractyre.co.uk](http://www.hubtractyre.co.uk).

**HUBTRAC TYRES**

United Kingdoms | Germany | Serbia

[info@hubtractyre.com](mailto:info@hubtractyre.com)